

AN APPARATUS FOR PROVIDING DIRECT DATA PROCESSING
ACCESS USING A QUEUED DIRECT INPUT-OUTPUT DEVICE

FIELD OF INVENTION

The subject of the present invention in general pertains to
a new Input-Output facility design that exploits high bandwidth
integrated network adapters.

BACKGROUND OF THE INVENTION

In a network computing environment, multitudes of
commands and requests for retrieval and storage of data are
processed every second. To properly address the complexity of
routing these commands and requests, environments with servers
have traditionally offered integrated network connectivity to
allow direct attachments of clients such as Local Area Networks
(LANs). Given the size of most servers, the number of clients
usually is in the range of hundreds to thousands and the
bandwidth required in the 10-100 Mbits/sec range. However, in
recent years the servers have grown and the amount of data they
are required to handle has grown with them. As a result, the
existing I/O architectures need to be modified to support this
order of magnitude increase in the bandwidth.

In addition, new Internet applications have increased the
demand for improved latency. The adapters must support a larger
number of users and connections to consolidate the network
interfaces which are visible externally. The combination of all
the above requirements presents a unique challenge to server I/O
subsystems.

Furthermore, in large environments such as International Business Machines Enterprise System Architecture/390 (Enterprise System Architecture/390 is a registered trademark of International Business Machines Corporation), there are additional requirements that the I/O subsystem must remain consistent with existing support. Applications must continue to run unmodified, and error recovery and dynamic configuration must be preserved or even improved. Sharing of I/O resources must be enabled as well as the integrity of the data being sent or received. This presents new and complex challenges that need to be resolved.

In order to achieve bandwidths which are dramatically higher and still achieve other required challenges, a new system architecture is needed.

This application is being filed on the same day as the following related applications: PO9-99-013, PO9-99-015, PO9-99-016, PO9-99-017, PO9-99-018, PO9-99-019, PO9-99-020, PO9-99-021, PO9-99-022, PO9-99-023, PO9-99-024, PO9-99-025, PO9-99-026, PO9-99-027, PO9-99-028, PO9-99-029, PO9-99-030, and PO9-99-031.

SUMMARY OF THE INVENTION

An apparatus for providing direct data processing access in a network computing system environment. The system environment has a main storage which can be connected to one or more application servers and is in processing communication with an interface element. The interface element has at least one adapter and can be connected to one or more application user(s). One or more queues are established in the main storage that can handle data without causing interrupts in the running programs.

Incoming data is received using the adapter and as data is received or modified, the status of the network computing system will be updated to reflect the new data or change. Data is then processed in the main storage after interrogating the multiple existing queues in the main storage simultaneously and forwarding them in turn to their appropriate destination or application server after a determination has been made by interrogating these queues.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the concluding portion of the specification. The invention, however, both as to organization and method of practice, together with further objects and advantages thereof, may best be understood by reference to the following description taken in connection with the accompanying drawings in which:

Figure 1 is an illustration of a network computing environment utilizing a channel subsystem and a control unit;

Figure 2 is an illustration of a network computing environment as per one embodiment of the present invention; Figure 2A shows how the use of some channel and control unit functions while Figure 2B shows the details of the Interface element;

Figure 3 is an illustration of a queuing mechanism as per one invention of the present invention;

Figure 4 illustrates SETUP SDU fields;

Sub B2 Figure 5A represents the format for the command request block for store-subchannel-QDIO data, while Figure 5B represents the format for the command response block for the store-subchannel-QDIO data command;

5 Figure 6 is an illustration of the format for Subchannel-QDIO description Block;

Figure 7 is a tabular illustration of the contents of input queues as per one embodiment of the present invention;

10 Figure 8 is a tabular illustration of the contents of output queues as per one embodiment of the present invention;

Figure 9 is an example of a queue information block content as per one embodiment of the present invention;

15 Figure 10 is an example of a SLIB block content as per one embodiment of the present invention;

Figure 11 is an example of a SLIBE block content as per one embodiment of the present invention;

Figure 12 is an example of a Storage List content as per one embodiment of the present invention;

20 Figure 13 is an example of a SBALE content as per one embodiment of the present invention; and

25 Figure 14 is an example of a Storage-List-State-Block content as per one embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

5 An example of an existing data processing system architecture is depicted in Figure 1. As shown in Figure 1, information is passed between the main storage 110, and one or more input/output devices (hereinafter I/O devices) 190, using channel subsystems 150. Through the switch 160, channel paths are established, comprising channels 155 and one or more control units shown at 180. These channel paths are the communication links established between the I/O devices 190 and the main storage for processing and exchange of information.

10 The main storage 110 stores data and programs which are input from I/O devices 190. Main storage is directly addressable and provides for high speed processing of data by central processing units and one or more I/O devices. One example of a main storage is a customer's storage area and a system area (not shown). I/O devices 190 receive information or store information in main storage. Some examples of I/O devices include card readers and punches, magnetic-tape units, direct-access storage devices (DASD), displays, keyboards, printers, teleprocessing devices, communication controllers and sensor-based equipment.

25 The main storage is coupled to the Storage Control Element (SCE) 120 which in turn is coupled to one or more central processing units (CPU) 130. The central processing unit(s) is the control center of the data processing system and typically comprises sequencing and processing facilities for instruction execution, initial program loading and other related functions. The CPU is usually coupled to the SCE via a bi-directional or uni-directional bus. The SCE, which controls the execution and queuing of requests made by the CPU and channel subsystem, is coupled to the main storage, CPUs and the channel subsystem via

different busses.

5 The channel subsystem directs the flow of information between I/O devices and main storage and relieves the CPUs of the task of communicating directly with the I/O devices so that data processing operations directed by the CPU can proceed concurrently with I/O processing operations. The channel subsystem uses one or more channel paths as the communication links in managing the flow of information to or from I/O devices. Each channel path consists of one or more channels, located within the channel subsystem, and one or more control units. In one preferred embodiment, a SAP I/O processor is also included as part of the channel subsystem.

10
15 Sub B3 As can be seen in Figure 1, it is also possible to have one or more dynamic switches or even a switching fabric (network of switches) included as part of the path, coupled to the channel(s) and the control unit(s). Each control unit is further attached via a bus to one or more I/O device(s).

20 The subchannel is the means by which the channel subsystem provides information about associated I/O devices to the central processing units; the CPUs obtain this information by executing I/O instructions. The subchannel consists of internal storage that contains information in the form of a channel command word (CCW) address, channel path identifier, device number, count, status indications, and I/O interruption subclass code, as well as information on path availability and functions pending or
25 being performed. I/O operations are initiated with devices by executing I/O instructions that designate the subchannel associated with the device.

5 The execution of input/output operations is accomplished by the decoding and executing of CCWs by the channel subsystem and input/output devices. A chain of CCWs (input/output operations) is initiated when the channel transfers to the control unit the command specified by the first channel command word. During the execution of the specified chain of I/O operations, data and further commands are transferred between the channel(s) and the control unit(s).

10 As explained earlier, in order to achieve bandwidths which are dramatically higher and move from 100 Mbits to Gbit technologies, a combination of improvements is required.

15 Figure 2 depicts the network environment of the present invention. Figure 2A depicts how the existing channel subsystem and control units is replaced by an Interface element as shown at 200 along the path 210. A Connector Interface Element and a Network Interface Element are also components of the Interface element as shown at 240 and 260 respectively. The present invention still allows the use of most programming and code structure of the existing architecture, but provides a much faster and more efficient system by bypassing the need for addressing many of the existing required functions such as the multitudes of channel commands, by eliminating the need for many processing steps.

25 The architecture of the present invention can be better depicted in the configuration represented by Figure 2B. The Connector Interface Element shown at 240 can include a plurality of processors, at least one of which is used for redundancy purposes and bus interface cards. An direct memory attached I/O device such as a Self-Timed Interface bus, hereinafter STI bus (shown at 230) as used in one embodiment of the present

30

invention, connects the Connector Interface element to the main storage 110 (also referenced to as the host) which in turn can be connected to a variety of other network elements and servers shown at 220 such as web-servers and other TCP/IP oriented servers. The Connector Interface Element is in processing communication with the Network Interface Element shown at 260 via another direct memory attached I/O device such as a Peripheral Controller Interface bus, hereinafter PCI bus as shown at 250 as used in one embodiment of the present invention. The I/O device adapters, at least one or more processors and some local storage reside in the Network Interface Element. Consequently, the Network Interface Element is connected to individual application users depicted at 270 such as Lotus Notes clients and Web browsers.

Data streams and requests for retrieval of data from servers by the application users is transferred via the Interface Element to the main storage where a plurality of queues can be setup for processing and storage of the data while providing the advantage of bypassing any need for causing an interrupt in the main program. The status of the network is then updated to reflect the changes. Once the appropriate response or data is retrieved from the servers, these multiple queues are interrogated simultaneously to determine the appropriate application server that the data needs to be sent to. Subsequently, data from the servers is also transmitted via the Interface Element to the application users in the same manner by establishing and interrogating the queues.

The queuing mechanism needs to be explained in more detail. The queuing mechanism of the present invention is referenced to as the Queued Direct I/O (QDIO) facility and comprises communication stacks. The input and output queues or both may be

provided. When the QDIO input queues are provided, the program can directly access data placed into the input queues by the adapter(s) of the Interface Element. Typically, the source of the data placed into such input queues originates from an I/O device or network of devices to which the adapter is connected. Correspondingly, when the QDIO output queues are provided, the program can transmit data directly to the adapter by placing data into the appropriate output queues. Depending on the adapter, the data placed into such output queues may be used internally by the adapter or may be transmitted to one or more I/O devices to which the adapter is connected.

The build in queues set are located in the program storage and are separate from the data control traffic. In a preferred embodiment up to 240 queue sets are provided. A direct adapter storage interface is also provided to minimize interrupts and other overhead. Each queue set in the mechanism provides for separate outbound and inbound queues; in one preferred embodiment, four outbound and at least one inbound queue. Each application is assigned to at least one queue set which comprises a number for input or output queues, and each queue set can share one or more adapters. The queue sets provide for a list of useable buffers and also a list of storage blocks for incoming/outgoing data. The buffers are further prioritized to address specific application needs. At initialization time and subsequently when desired or a change is required, queues are initiated for each application(s). Queues are naturally static at initialization time when they are flexibly defined but as new applications are being assigned, the queuing becomes dynamic and updates are made at intervals or continuously, as desired, to reflect the latest nature of them.

For both QDIO input and output queues, main storage is used as the medium by which data is exchanged between the program and the adapter. Additionally, these queues provide the ability for both the program and the adapter to directly communicate with each other in an asynchronous manner which is both predictable and efficient without requiring the services of a centralized controlling mechanism, such as an Operating System Input/Output Supervisor, and the resulting overhead such a control mechanism implies. Both input and output queues are constructed in main storage by the program and are initialized and activated at the QDIO adapter, as described below. Each queue consists of multiple separate data structures, called queue components, which collectively describe the queues' characteristics and provide the necessary controls to allow the exchange of data between the program and the adapter.

A Queuing status block is established to reflect the changes dynamically as per the changing I/O activity status. The queues comprise buffers which reflect channel ownership in the channel subsystem, and the ownership also gets updated as the picture dynamically changes. The queue sets are connected via the adapter to the host/main storage. In one preferred embodiment where separate images are provided for virtual systems, each virtual system can also be assigned a separate queue set in the queuing mechanism.

25 Exchange of Data

The program and the QDIO adapter use a state change signalling protocol in order to facilitate the exchange of data. This protocol is applied to each input and output data buffer associated with each of the active input and output queues. Both input and output buffers are managed and exchanged between the

program and the adapter by placing the buffer into various states which are maintained in a special location that is set aside and is associated with each buffer. For example for input queues, asynchronous to the execution of the program, the QDIO adapter places data received from the associated I/O device into input buffers that are in the input buffer empty state. For each input buffer that has data placed into it by the adapter, the state of the buffer is changed from input buffer empty to input buffer primed. The program then examines in sequence (such as round robin) the state of all input buffers associated with all QDIO input queues and processes the data in each input buffer that is in the input buffer primed state. Upon completion of input buffer processing, the program may change the state of the buffer to input buffer empty in order to make the buffer available for reuse by the adapter for subsequent input data from the attached I/O device. When the program changes the state of one or more input queue buffers from primed to empty, it executes a SIGNAL ADAPTER instruction which designates the read function in order to signal the adapter that one or more input buffers are now available for use.

Similarly, for output queues, asynchronous to the execution of the QDIO adapter, the program places output data into one or more QDIO output queue buffers that are in the output buffer empty state, output buffer not initialized state, or output buffer error state and then changes the state of each such buffer to the output buffer primed state. The program executes a Signal Adapter instruction which designates the write function in order to signal the adapter that one or more output queues now have data to be transmitted to the I/O device attached to the adapter. Asynchronous to the execution of the program, the QDIO adapter transmits the data in each QDIO output buffer that is in the output buffer primed state to the attached I/O device. Upon

completion of transmission, the adapter changes the state of each such buffer to the output buffer empty state in order to make the buffer available for reuse by the program.

5 Additionally, each data buffer also has an ownership state which identifies either the program or the adapter as the controlling element of the buffer for the period of time that element is responsible for managing and processing the buffer. Additionally, the queuing mechanism provides for a prioritization scheme for the queues. Device addresses are used as queue anchors, retaining I/O heritage to reduce cost.

Queue Components

10
15
20
Sub B4
Figure 3 depicts the control structure overview for the input and output queues associated with a QDIO subchannel. Figure 3 also demonstrates the queue components as defined for the present invention. The Queue Information Block (QIB) shown at 310 contains information about the collection of QDIO input and output queues associated with a given subchannel. It provides information for collection of input and output queues for the adapter associated with the subchannel. One QIB is defined per QDIO subchannel; Figure 9 provides the format of queue-information block as per one embodiment of the present invention.

25
The Storage List Information Block (SLIB) shown at 320 provides for the address of information stored pertaining to each queue. One SLIB is defined for each queue. SLIB contains information about a QDIO queue and has a header and entries called storage-list-information-block entries containing information about each of the buffers for each queue. Figure 10 provides SLIB format as per one embodiment of the present

invention. Furthermore, a storage list information block element or SLIBE can be provided containing information regarding the QDIO data buffer as determined by the corresponding SL entry. Figure 11 depicts a sample SLIBE content.

5 The Storage List or SL shown at 330 defines the SBAL or storage block address lists that are defined for each I/O buffers associated with each queue. One SL is defined for each queue which contains an entry for each QDIO-I/O buffer associated with the queue. SL provides information about the I/O buffer locations in main storage. As per one embodiment of the present invention, Figure 12 provides a sample SL content. SL also provides the absolute storage address of a storage block address list. In turn, SBAL contains a list of absolute addresses of the storage blocks that collectively make up one of the data buffers associated with each queue as shown at 340. A storage block address list entry or SBALE is also provided as part of each SBAL. Each SBALE contains the absolute storage address of a storage block. Collectively, the storage blocks addressed by all of the entries of a single SBAL constitute one of the many possible QDIO buffers of a QDIO queue. In a preferred embodiment, the number of these possible QDIO buffers equal 128. Figure 13 provides for the format of a SBALE as provided by one embodiment of the present invention. SBALF or SBAL Flags contain information about the overall buffer associated with the SBAL containing each SBALE, and not just about the storage block associated with each SBALE. The description of contents of the SBALF field is different for each SBALE within the SBAL.

25 A Storage-List-State Block or SLSB is shown at 350. The SLSB contains state indicators that provide state information about the QDIO buffers that make up a queue. A QDIO buffer consists of the collection of storage blocks that can be located

using all of the addresses in a single storage-block-address list. Depending on the current state value in an SLSB entry, either the program or the QDIO control unit can change the state of the corresponding QDIO buffer by storing a new value in the entry. Figure 14 provides a sample SLSB format as per one embodiment of the present invention. SLSB also provides for a SQBN or state of queues buffer N which provides the current state of the corresponding QDIO buffer. The QDIO buffer that corresponds to a given SLSB entry is determined by the storage list entry having the same sequential position in the storage list as the SQBN field has in the SLSB. In one embodiment, the state value consists of two parts, bits 0-2 indicate whether the buffer is owned by the program or the QDIO control unit and whether the buffer is an input or output buffer. Bits 3-7 contain a value that indicates the current processing state of the buffer. In this embodiment different bits can also be identified to mean different configurations. For example, bit zero can be established to indicate program ownership, while bits 1 and 2 provide for QDIO control unit ownership and buffer type respectively. Bits 3-7 can contain a binary value that indicates the current processing state of the associated buffer such as empty (available for data storage), primed (available to be processed), not initialized (not available for use), or halted (contains valid data but data transfer was prematurely halted by program executing Halt Subchannel), and Error (associated buffer is in an error state and contents of buffer are not meaningful).

Storage Blocks or SBs are storage blocks that are defined collectively to define a single I/O buffer.

The overall process by which QDIO queues are used to exchange data between the program and a QDIO adapter is as follows:

1) The program constructs one or more input queues and/or output queues in main storage. The maximum number of such queues that a QDIO recognizes depends on the type and model of the adapter. These limits can be used by a CHCS or Store_Subchannel_QDIO_data command.

2) The program transmits the main storage location of each input or output queue to the QDIO adapter by use of an establish_QDIO_Queue channel command. To accomplish this, a Start Subchannel command instruction is also executed which designates a QDIO subchannel that is associated with the QDIO adapter.

3) Upon successful completion of the establish_QDIO_queues command, the program then activates the queues at the QDIO adapter by executing an activate_QDIO_queues channel command. Upon its successful completion, the subchannel is placed into the subchannel-active state and the QDIO-active state. Again a Start Subchannel is used to accomplish this. Alternatively, the active_QDIO-queues command may be chained to a previous establish_QDIO-queues command when Start Subchannel is executed in the previous step.

4) Upon activation of the queues, both the program and the adapter can asynchronously transmit data to each other by appropriate use of the queues as long as the designated subchannel, with which the queues are associated, remains in a sub-channel active and QDIO-active state.

5) Any action that causes a QDIO subchannel to exit the subchannel_active and QDIO-active states causes the QDIO adapter to stop examining and processing all queues associated with the subchannel. This includes: a program initiated action such as

clear or halt subchannel that designates a QDIO subchannel, an error condition (including errors within QDIO adapter, the channel subsystem or elsewhere in the central processing complex that affects the state of a QDIO subchannel) that causes a QDIO-active subchannel to enter a status pending with alert-status state, or a reset/reconfiguration action initiated by the program or operator that affects the ability of the QDIO adapter to process QDIO subchannels or their queues, such as a deconfigure-channel-path command that deconfigures the only available QDIO-channel path to which a QDIO subchannel is associated.

The design of the present invention provides the ability to share access to this device across multiple communication stacks, multiple priorities and multiple virtual guests and/or multiple logical partitions. A new mechanism for mapping various resources to queues which are serviced by the microcode is devised to facilitate resource allocation and dynamic configuration, including single point of definition. This new mechanism includes a new control path interface to facilitate initialization of the configuration parameters and the queue structure(s). This includes dynamic expanding of the number of queues and queue elements as traffic patterns and feedback indicate. The organization of control blocks is critical to minimize the amount of data which needs to be translated across the various software layers, given virtual addressing constraints relative to page fixings as required by the I/O.

As the data comes in through the adapter, a buffer is assigned to it and in this way, cache pollution is avoided. The channel subsystem in this configuration still operates in the traditional mode for the control flow but in the new manner explained above for data flow providing an interrupt free outbound traffic. The inbound traffic has to allow for

interrupts. For the inbound traffic, it is not always obvious as when the data arrives exactly and the mechanism allows for selective use of interrupts. In one embodiment there is even an adaptive rate established between the interrupts and the polling rate. Hence, inbound interrupts only take place during low data rates.

Queue Priority and Sequencing

Both input and output queues are processed by a QDIO adapter in priority sequence as follows:

1) The lowest numbered queue has the highest priority and the highest numbered queue has the lowest priority.

2) For output queues, the adapter processes primed state buffers for the highest priority output queue before processing buffers associated with the next highest priority output queue.

3) For input queues, adapter processing is dependent on the type of QDIO channel path to which it is configured. For adapters configured to OSADE channel paths, the adapter processes incoming data according to the inherent priority of the data, placing the data into empty state buffers of the queue with the associated priority.

4) Depending on the type of QDIO adapter and the model, input queues may have priority over output queues, vice versa, or no defined priority may exist between the two.

5) For both input and output queues, each queue is processed in a sequential round robin manner starting with the

buffer associated with SBAL 0, called buffer 0, and continuing until the buffer associated with the last SBAL or buffer, is processed at which point processing starts again with buffer 0.

5 For input queues, each buffer in the input buffer empty state is sequentially processed until the adapter encounters a buffer that is not in the empty state or no more input data is received. The adapter then processes the non-empty state buffer by looking at whether the input buffer is primed, input buffer not initialized, or input buffer error state is detected. When it sees an adapter in any of these states, the process of scanning the remaining queues entries is suspended until either an interval or time has elapsed, a SIGNAL ADAPTER read function is executed, or additional input from the device or network of devices is detected. This process is continued until the buffer reaches an input buffer empty state at which time it is processed and the adapter resumes the sequential processing of the remaining queues entries. If the Input buffer is in any other state, the adapter terminates the processing of all queues for the associated QDIO subchannel.

20 For output queues, each output buffer primed state buffer is sequentially processed until the adapter encounters a buffer that is not in the primed state or until a model dependent "fairness" algorithm causes the adapter to process the next lower priority output queue. When an output buffer that is not in the output buffer primed state is detected, the adapter processes the non-primed state buffer as follows. When the output buffer is empty, output buffer is not initialized or is in an error state, the adapter suspends the process of scanning until an interval has passed or a SIGNAL ADAPTER write function is executed. Depending on the model, when one or more of these events occur, the adapter again accesses the SLSB entry for the same I/O buffer that was

previously detected as being in one of these states, the adapter again suspends processing of that queue. If the buffer is now in the output buffer primed state, the buffer is processed and the adapter resumes the sequential processing of the remaining queue entries. If the output buffer is in any other state, the adapter terminates the processing of all queues for the associated QDIO subchannel.

The above configuration provides for interlock data movement avoidance between the queue mechanism where the application can place network data on a queue which can be accessed too easily. The initiative and/or control is passed for the queues between the server software and the microcode as to avoid unnecessary interrupts where ownership of queues is passed back and forth and unnecessary data movements where ownership of data is transferred back and forth under guaranteed interlock to eliminate out of order updates. All updates of both the shared states and queues must be in absolute synchronization. There is also a shared state interface control or SSIC mechanism used to control logical ownership of I/O buffers.

Coupled with these initiatives is a new mechanism for software to interrogate status updates as described below. Previously, this was provided exclusively via interruption. In this way the present invention enables interrogation across queues (multiple priorities) under control of a timer and, as described earlier, in periods of low activity, interrupts are provided and then when activity reaches a certain threshold, control is switched to use the timer.

The interface must be designed to establish a cooperative environment with the Upper Layer Protocols or the ULPs such that the cost to the ULP of executing I/O is minimized. Cost

reduction techniques for both small and large data packets must be designed into the interface. Besides the obvious costs of I/O in terms of instructions per operation, there exists a set of other costs related to but not directly measured against the cost of the current structures. These may be generally described as the price I/O users pay in their own code base to either avoid or minimize the measurable cost of I/O. If one could have a zero impact I/O structure, a ULP would be free to optimize for its environment rather than conform to rules determined by an I/O structure.

In the present invention a new controller area is defined, and during the initialization time, a numeric value is passed to ULP ENABLE which specifies the amount of buffer space needed to build a header required by the adapter, preferably a GigaEnet adapter. A connection manager will then pass this value to all ULP's that wish to utilize the adapter, and during data flows, all datagrams sent will have that amount of storage between the header and the datagram. This methodology removes the need for allocating storage in the data path or adapter header placement which in turn will affect the overall system throughput. In addition the present invention provides for the sharing of network attachment with each ULP owning its own device address.


Important Instructions

The present invention provides for several novel instructions and commands that does not exist in the present technology. The first of these is called a Signal Adapter Instruction, hereinafter SIGA instruction. The SIGA instruction comes in several flavors such as a read, a write, and a synchronize SIGA. The command is primarily established to give operational initiative that is missing from the existing systems.

The SIGA instruction works almost like a wake-up call, reminding the system to go and check its queues and process what is pending. It functions as a mid-I/O intrusion instruction that is designated for the checking of the queues. It is an I/O operational signal structure which in case of its synchronization flavor, synchronizes the data in the queues to ensure the state information is pushed out and the queues are processed. It can be initiated by a program timer if desired.

In a preferred embodiment of the present invention, the SIGA comprises an eight bit function code and if called for, a 32 bit parameter is transmitted to the adapter. The following is an example of a SIGA structure.

I. SIGA

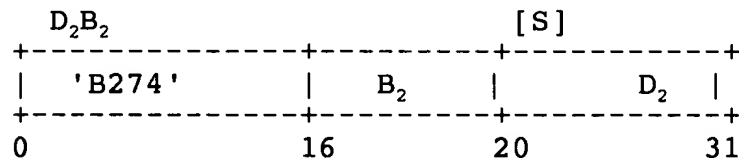

General register 0 contains the function code which specifies the operation to be performed by the adapter. General register 1 contains the subsystem-identification word, which designates a QDIO subchannel by implication and the QDIO adapter that is to be signaled. Depending on the specified function code, general register 2 contains a 32 bit parameter. The definition and purpose of this parameter depends on the function code. When the function code specifies either (1) initiate-output queues, or (2) initiate-input queues, general register 2 specifies which input or output queues are to be processed by the adapter.

Function Code 0 / Initiate Output - When the function code specifies initiate-output, the associated QDIO adapter is signaled to asynchronously process one or more output queues associated with the specified subchannel. In this case, the instruction is referred to as SIGA-w (SIGNAL ADAPTER - write). The output queues that are to be processed are specified in general register 2.

Function code 1 / Initiate Input - When the function code specifies initiate-input, the associated QDIO adapter is signaled to asynchronously process one or more input queues associated with the specified sub-channel. In this case, the instruction is referred to SIGA-r or Signal Adapter read. The input queues that are to be processed are specified in general register 2.

Function code 2 / Synchronization - When the function code specifies synchronize, the virtual machine is signaled to update the data queues SLSB and SBAL entries in order to render them current as observed by both the program and the QDIO adapter. In this case, the instruction is referred to as SIGA-s or Signal Adapter synchronize.

SIGA-s is required in virtual machine models where QDIO data queue sharing between the program and the adapter is simulated by the use of separate unshared copies of the queues SLSB and SBAL components. One copy of these components is used by the program and one copy is used by the adapter. The execution of SIGA-s signals the virtual machine to update these unshared copies for the data queues as necessary so that both the program and the QDIO adapter observe the same contents for these queues components.

When SIGA-s is specified:

1) The output queues for the designated subchannel that are to be synchronized are specified in general register 2.

2) All input queues for the designated subchannel are synchronized.

3) The QDIO adapter is not signaled.

4) The virtual machine is signaled if the program is executing in a virtual machine environment. No virtual machine signal is generated when the program is not executing in a virtual machine.

For the SIGA-w and SIGA-r and SIGA-s functions, the second operand (B_2D_2) is ignored.

When the SIGA-r and SIGA-w or SIGA-s functions are specified, general register 2 specifies a 32 bit parameter that designates which input or output queues are to be processed by the adapter. Bits 0 through 31 correspond one for one with input or output queues 0 through 31 respectively and are called queues indicators QI. Additionally, both input and output queues are prioritized by queue number with the lowest numbered queue (queue 0) having the highest priority and the highest numbered queue (queue 31) having the lowest priority.

When a queue indicator is one and the corresponding queue is valid, the QDIO adapter is signaled to process the corresponding input or output queues. When a queue indicator is one and the corresponding input or output queue is invalid, the queue indicator is ignored.

A queue is valid when it is established and is active. A queue is invalid when it is not established, is not active, or the model does not allow a queue to be established for the corresponding queue indicator.

5 When the queue indicator is zero, no action is required to be taken at the adapter for the corresponding queues. When all queues indicators in general register 2 are zero, the adapter is not signaled and no other operation is performed.

10 Subsequent to the execution of SIGA, the QDIO adapter associated with the designated subchannel performs the specified function. When the SIGA-w function is specified, the adapter processes each specified output queue in priority sequence. For each queue that contains queue-buffers in the primed state, the data in the buffers is transmitted and upon completion of
15 transmission, the queue buffers are placed into the empty state. This process continues until the data in all primed output queue buffers, for all specified output queues, has been transmitted.

20 When the SIGA-r function is specified, the adapter processes each specified input queue in priority sequence. For each queue that contains queue-buffers in the input buffer empty state, data is placed into the queue buffers as it is received and upon completion of the transmission, the queue buffers are placed into the input buffer primed state. This process continues for each
25 empty queue buffer in sequence until a buffer that is not in the input buffer empty state is reached. This process is then repeated for the next lower priority input queue. If any queue buffers for all specified input queues have been filled with data.

Shared State Interface Control

Another important aspect of the present invention is its ability to share state interface. The Shared State Interface Control or SSIC function that provides shared state interface between the QDIO adapter and a QDIO program, such as a multipath channel program, can best be described in the following diagram:

WRITE

QDIO Program	State	QDIO Adapter
Fill 'n' SBAL's with data	---	primed
set state to multiple		
SBAL's may be processed		
Issue SIGA to drive the		
adapter		
		Process all outbound data
	empty <-----	set state to
Program frees 'empty'		
write buffers after SIGA		
'last ditch' timer will free		
any lingering buffers		

READ

QDIO Program

State

QDIO Adapter

If required, replace used
buffers for multiple SBALEs

5 within each SBAL
set state to -----> empty

Fill inbound buffers

for each SBAL used

10 primed <-----set state to

low traffic - new PCI

else nothing

Drain data and pass to ULP,
Replace all used buffers

15 set state to ----->empty

II. Store Subchannel QDIO Data or CHSC Command

Input/output operations for QDIO involve the use of an I/O
device represented by a subchannel in the channel subsystem. The
proper execution of QDIO I/O operations depends on certain
20 characteristics of the subchannel. Examples of such
characteristics are:

- o whether the subchannel supports QDIO operations

- o the format of the queues

- o the number of input and output queues

25 o I/O-device requirements regarding program issuing of
the SIGA instruction.

The store-subchannel-QDIO-data command provides the program with a way to determine from the channel subsystem the QDIO characteristics (listed above) that the program must take into account in order to perform I/O operations using a specified subchannel. Previous mechanisms that allow programs to determine operational characteristics of I/O devices normally consist of the program executing a channel program to obtain such information from the I/O device.

By providing the store-subchannel-QDIO-data command, it is possible for I/O devices to have different QDIO characteristics and for the program to determine what those characteristics are prior to communicating with the I/O device itself.

The CHSC command is used to obtain self description information for the QDIO adapters associated with a specified range of subchannels. When the CPC is operating in a mode where several images are used, the CHSC command is used to obtain self description information for the QDIO adapters associated with a specified range of subchannel images, configured to the logical partition that executed the command information for subchannel images configured to other logical partitions, if any, is not provided. Figure 5A represents the format for the command request block for store-subchannel-QDIO data. Figure 5B represents the format for the command response block for the store-subchannel-QDIO data command. In addition, Figure 6 represents the format for Subchannel-QDIO description Block.

In short the CHSC command specifies which device the request for processing can be sent to. It further provides for the format and attributes of the QDIO, such as the size and attribute of the queues, and other characteristics that may relate to the specific processor. QFMT or QDIO Queues Format and QDIOAC or

QDIO Adapter characteristics in the above figures represent this information. IQCNT provides the Input Queues Count and OQCNT provides an Output Queue Count.

III. QDIO Priority Instructions

5 The user can issue a request leading to a SETUP_REQ instruction. When processing this instruction a device address will be assigned to the user which will be passed along via a SETUP SDU instruction. The SETUP primitive will also pass
10 priority queue information to the adapter. The format of this is shown in Figure 4. Length is defined by Length of DIF including this field. Category is defined as the value of primitive
15 specific. Type denotes the value of data path device address. DEV_CUA is a multi-digit CUA in packed format. DEV_NO. refers to the device number assigned to this ULP's connection. Priority
20 Service Order is the order by which the adapter will service the queues. It is used to provide a favorable service for higher priority vs. lower priority queues. Maximum Service Limit Units refer to the units that are used under a favored treatment based on the amount of outbound data allowed to be processed during one
25 processing interval. It can be defined in three flavors: maximum number of packets to be transmitted - counts packet size without regard to packet size; maximum number of bytes allowed to be transmitted; and maximum number of SBALs that may be transmitted - without regard to number of packets or amount of data within
the SBAL. Maximum Service Unit Priority provides the number of units on a priority basis.

Data Packing

Data packing is another important feature that is affected by the present invention. As the cost of I/O decreases, the need

to prorate traffic to reduce the cost per data element decreases. However, the need still exists and the present design will allow for a multi-path channel or MPC to perform data packing through the device driver code which "unpacks" packed data received from the ULPs directly into a Storage_Block_Address_List array so that packed format data is not handled directly. This approach is taken because packed data resides in slower memory than the Storage_Block_Address_Lists array provides. In addition, data packing for small objects is supported and non-contiguous headers for large objects is supported within a single data queue. In this context a non-contiguous header implies the use of a single entry for a network or control headers. A preferred ULP to be supported is TCP/IP which will build upon existing packing algorithms to reduce cost of I/O by continuing to pro-rate the cost across multiple datagrams. When an MPC is used, the device driver code will unpack the datagrams into the Storage_Block_Address_List arrays. To provide for the efficient flow of large data objects, unpacked datagrams will also be supported but the criteria upon whether a given flow is to be packed or not depends upon the size of the packet. To further optimize the system when TCP/IP is used, TCP/IP will include a controller work area, preferably a 32 byte header, and the start of the datagram for all data transfers. In all cases the controller area, if specified, must be provided by the ULP as part of any network or control header. This includes single datagram transfers where network headers, any control header, any defined data header and the user data have been moved to form a continuous bit stream. Headers must also be supplied when non-continuous header datagrams are used. MPC will not insert the header on behalf of the ULP. Note that an SBALE or a Storage_Block_Address_List_Element is also defined, preferably with a 4k page limit to allow attachment of the Queued Direct I/O to different switches such as fiber optic switches and International Business Machine's ESCON

switch (ESCON is a registered trademark of IBM Corp. of Armonk).

Another problem that severely impacts current systems is the lack of an efficient gather/scatter function. Since data chaining is exposed to the remote partner, it is no longer efficient for network communications. Yet data movements within the server continue to be major performance inhibitors for mid-size or large data objects. This problem is resolved by inventing an out-of-band header(s) such that the user data need not be moved or copied in construction of the data stream.

The problems with system dispatching is also minimized by establishing a common user interface such that the user can assist in dispatch control. When an MPC is used, the MPC will establish a Direct Queue Area or a DQA for each ULP exploiting the network attachment. This area will be used to control the queuing of inbound data as well as provide the control structure to be used for dispatching options and processing.

The present invention has enhanced the existing system support for high performance applications that wish to take advantage of high speed media attach. Intent is to minimize inbound dispatching by providing a set of optional mechanisms that bypass the traditional SRB dispatch from disabled code that occurs during current I/O disabled completion. Since there is no change of ownership required for such protocols such as TCP/IP, the recovery procedure will no longer be needed in many instances. Also, no assigned buffers (ASSIGN BUFFER) are required for inbound traffic (TCP/IP). The data will not be blocked by the MPC or multipath channel and the interface layer will perform the deblocking function itself. Since MPC is not deblocking into smaller datagrams, there is no need for an assign buffer. The operation is driven by a disable timer during mid-

high traffic rates, and all inbound queues for all interfaces will be processed via the timer mechanism, and fast interrupt indicators will be set off for all read data paths. This in turn will eliminate the need for some inbound dispatching functions like the use of MPC supplied Direct Queue Area. The ULP will include a user area for specific processing and the SBAL format will include the addresses and lengths of input data. A new function, IUTIL CM_ACT is also provided that will contain fast dispatching (FAST DISPATCH) which in turn will allow the ULP to optimize its own environment.

Dynamic Configuration

In the existing systems, all Gateway-types of attachments need to have a configuration file defined which identifies various items. These items include the following:

1) Host Device Address - this definition is needed to define the Host Number and Host Unit address, especially when multiple or virtual images/machines are being used when passing data across any channel interface. This information is needed by the channel subsystem to determine which Host connection is to receive the incoming data. It is also needed for each Host or Host Unit Address which is to be used to transfer data across the channel interface to an adapter.

2) Host Application - This identifies which Host Application is using the Host device Address.

3) Application Specific Address - This address is used to identify the specific Application Server to which the inbound data received from the LAN is to be routed. Each Application Specific Address is directly related to the Host Device Address

and Host Application.

4) LAN Port Number - this identifies which LAN Port is to be used for sending data which is received at the Gateway from the Host Device Address.

5) Default Routes - these are defined on a Host Application basis. Each Host Application can have a default Host Device Address specified. This Host Device Address is used to send all traffic received from the LAN for a specific Host Application for which an Application Specific Address has not been defined. For example, if a TCP/IP packet is received from the LAN and the TCP/IP address found in the packet was not defined in the configuration file, this packet would be sent to the Host over the Host Device Address defined by the Default Route entry.

6) Setting Thresholds for Priority Traffic - this defines the percentages of processing which should be used on the various priority traffic. For example, this command could be used to define the maximum number of bytes which should be processed for a specific priority before moving on the check for work for a different priority.

The present invention changes all that. All configuration information defined above is no longer needed in the configuration file. In fact, the configuration file is no longer required on the Gateway attachment using the QDIO Interface. All the information is presented to the Gateway device at initialization time through various tables and commands which are passed over the channel interface.

A table is provided which maps all the Host images and Host Device Addresses which will be using the QDIO Interface to the specific bits defined in the SIGA vector. This list is derived directly from the information defined in the IOCDS on the Host.

5 Each entry in the IOCDS which defined an ADIO device causes an entry to be placed in the initial table. At initialization time, each entry in the table is assigned a specific bit in the SIGA vector. Also, at any time after initialization, this information can be dynamically changed and Host Device addresses can be added and/or deleted.

10

The Host Application which is to use the Host Device Address is defined using a command called MPC_ENABLE-IC Command. The Application Specific Address is defined using the SETIP command. The Application Specific Address can also be deleted using the DELIP command. The LAN Port Number is specified in the STRTLAN Control Command. The Default Routes are defined using the SETRTG Control Command. This is a new control command defined specifically in the present invention. Setting thresholds for priority traffic is defined using the SETPRIORITYTHRESHOLD Control command which defines the maximum number of bytes which can be processed for a specific QDIO Priority QUEUE before checking for work on the other QDIO Priority QUEUES. This command allows the user to tailor each individual system for its specific application requirements.

15

20

25 Using this and the queue priority instructions the specific algorithm which is to be used when servicing each of the different priority queues is addressed. Each Host Device has the ability to set its own unique priority algorithm.

SIGA Vector Implementation

5 The SIGA Vector is needed to give initiative to the QDIO connected Gateway device. One problem which is solved by the present invention is the use of Priority Queues and how a priority algorithm which needed to serve multiple priority queues at the specified priority values. In other words, certain queues represented by the SIGA Vector needed to be completely serviced on each invocation because they were the highest priorities. Each queue at the next lowest priority needed to have the ability to have some of its traffic left pending if its thresholds for service were reached. The higher priority queues then needed to be rechecked if more work had come active while the lower priority queues still had work pending.

10 To accomplish the above task, the SIGA Vector is split into a priority bit mask. Each Device Address which was assigned to the QDIO interface had one queue assigned for each of the possible priorities. In one embodiment of the present invention, there are four bits assigned to each of the different Device Addresses. When a certain priority work request needs to be sent, the bit corresponding to the Device Address and its corresponding priority is set. As requests come in from different priorities or from different Device Addresses, their bits would also be set. This gives the Host System the ability to five multiple different work requests in the same SIGA Mask.

15 Another problem addressed is the effective service of various QDIO priorities when only a single bit is being used to signal the Gateway device work. Since it is possible that all the work for a certain priority would not be serviced before checking back for more work for the other priorities, the Gateway device needed to be able to remember the current work, but be

able to go back and look for more new work. To do this, the Gateway device would write a specific value into the SIGA Vector area after each read of the vector. Once the Host code detected the value written by the Gateway device, the vector would be
5 completely cleared and then new work requests were added. Clearing of the vector after each read enables the fairness algorithms so the different priorities could be processed at their desired rates.

One additional problem to be addressed is the number of bits
10 which is needed to be scanned to identify the work requests. In one embodiment of the present invention, there are a possibility of 240 Device Addresses. Each Device Address has 4 priorities, so this computes to $4 * 240$ or 960 possible bit settings. The overhead of scanning all these bits to find the work requests is
15 too high. To make the searching faster, the 960 bits are split into 30 different 32-bit masks. When a new work request is added, the bit in one of the 30 different 32-bit masks is set. Also, the bit in the Work Vector which corresponds to the 32-bit mask in which the bit was set is also set.

20 The work vector which identified the specific 32-bit mask made finding the bits which were set much more efficient. The Gateway device can now scan the Work Vector to find the appropriate 32-bit mask. The Gateway device can then just fetch the proper 32-bit mask to find the work request.

25 In one embodiment of the present invention, all high priority traffic is handled completely and then the amount of data processed from the other queues is assigned a weight using the SETPRIORITYTHRESHOLD command. Once the lower priority queues have been handled, it is possible some data could be residual in
30 these queues. It then becomes necessary to go back and check the

priority queues if new requests have arrived. To make sure only new requests have been added to the List when it is refetched, each time the adapter reads the SIGA Vector, it sets a field to indicate the vector has been read. The next Host request will then see the adapter has read the SIGA Vector. It is then completely cleared by the Host code before setting the new request.

Error Reporting During Run Time - Non Catastrophic

As data is being transferred across the QDIO interface to and from the Gateway device, it is possible for errors to periodically occur in the data stream. Intermittent errors can be recovered. Errors which become persistent need to be detected so the interface can be taken down and then restarted. All this needs to happen at run time and require no user interventions.

To accomplish this, Error States are defined for the SLSB Status Block. When the adapter detects errors in the data stream, an error state is set in the SLSB. The specific reason for the error is stored in the SBALF (SBAL Flags) which are located in the SBAL which is associated with the SLSB that has the error state set. Using this approach, the Host is able to monitor the number of errors which occur within a specified time period. If the number of errors exceeds the pre-determined threshold which has been set, the QDIO Connection is terminated. If the error rate stays under the specific threshold, the connection will remain active.

Concurrent Patch

Concurrent Patch is a feature provided in QDIO. The Concurrent Patch feature allows the customer to install a new

level of microcode to the adapter without interrupting any of the applications and/or services using the adapter. For Channel adapters this was not a major problem because all of the applications using the channel adapter did not require any connection-type of information to be kept across the code update.

For the Network Adapters which are using TCP/IP, the adapter contains information about each client station in the LAN and each connection which is present with the Host Applications. The connections are active once the adapter is activated and remain present while the card is active. There are no Gateway platforms today which will keep the TCP/IP sessions active during a code update. The QDIO Hydranet adapter is the first to offer the Concurrent Patch feature in a Gateway environment.

QDIO in Virtual-Machine Environment

The key control mechanism for QDIO is the storage-list-state block (SLSB), comprising a vector of state entries for each queue, with one entry per storage-block-address list (SBAL). An SBAL contains the addresses of a set of storage blocks within main memory, the collection of which is termed a buffer, either input or output.

Each SLSB entry represents a finite-state machine (FSM), an automaton well known in the art, defining the states of a computing process, the inputs and outputs of the process for each state, and the allowed transitions among the states. Whereas a standard FSM is executed by a single process, the FSM in an SLSB entry in this invention is shared and used as a control and communication mechanism by a host program on the one hand and by an I/O adapter on the other. The FSM is used by each to drive the other. The set of states of the FSM is strictly divided into

two subsets, program-owned states and adapter-owned states. The ownership is indicated by bits within the encodings of the state-values. Each side exchanges ownership with the other to cause control and processing to pass between them.

5 Thus, the FSM of an SLSB entry embodies two sets (one each in the program and the adapter) of one or more processes under the control of the FSM definition. These sets of processes are kept separate and carefully controlled through the two distinct subsets of FSM states, implying ownership by one side or the other, as described above. However, within either side (program or adapter), multiple processes may share and be controlled by the FSM. Such sharing processes within a given side may use the state-values within its own side's ownership subset to control and communicate with other processes on its own side, but not the other side. That is, neither side is permitted to understand or act upon the meaning of a specific state-value that is owned by the opposite side, other than to transfer ownership according to the FSM definition. This strict separation of the program and the adapter within the FSM ensures that each side can be a free-running process (or set of processes) through the entire set of FSMs in an SLSB without the possibility of deadlock.

Within the preferred implementation, there are separate FSM definitions for input and output queues. The five FSM states for input queues are as follows:

- 25 * input buffer not initialized (program owned)
 * input buffer empty (adapter owned)
 * input buffer primed (program owned)
 * input buffer error (program owned)
 * input buffer halted (program owned)

The five FSM states for output queues in the preferred implementation are as follows:

- * output buffer not initialized (program owned)
- * output buffer empty (program owned)
- * output buffer primed (adapter owned)
- * output buffer error (program owned)
- * output buffer halted (program owned)

Figures 7 and 8 depict sample Input and Output queues as relating to this particular area as will be discussed below. With the FSM in each SLSB entry being executed cooperatively but independently by the program and the adapter, the processing of an entire input or output queue is accomplished by sequentially cycling through the full set of FSMs (and, hence, buffers) within the SLSB controlling the queue.

The following control mechanisms is an abstract, simplified version of the preferred implementation for the proper sequencing through the buffers.

Output Queues:

Program

Current_Entry = 1;

LOOP: DO WHILE Current_State = ^PRIMED AND output data exists;

Execute FSM for Current_Entry;

Current_Entry = Current_Entry + 1 modulo SLSB_Size;

END;

WAIT (for more data from application or Current_State change);

GO TO LOOP;

Adapter

Current_Entry = 1;

LOOP: DO WHILE Current_State = PRIMED;

5 Execute FSM for Current_Entry;

Current_Entry = Current_Entry + 1 modulo SLSB_Size;

END;

WAIT (for SIGA-w signal);

GO TO LOOP;

Input Queues:

Program

Current_Entry = 1;

LOOP: DO WHILE Current_State = ^EMPTY;

15 Execute FSM for Current_Entry;

Current_Entry = Current_Entry + 1 modulo SLSB_Size;

END;

WAIT (for PCI or timer interruption);

GO TO LOOP;

20 Adapter

Current_Entry = 1;

LOOP: DO WHILE Current_State = EMPTY AND input data exists;

Execute FSM for Current_Entry;

25 Current_Entry = Current_Entry + 1 modulo SLSB_Size;

END;

WAIT (for more data, SIGA-r signal, or Current_State
change);

GO TO LOOP;

These control mechanisms (i.e., the FSMs and the sequencing logic to loop through the FSMs in an SLSB) keep the program and the adapter in synchronism with each other without deadlock as the cooperating processes on each side move in tandem through different portions of the SLSB. The invariant conditions are that each side always processes FSM states not processed by the other, and as data is moved inbound or outbound, each side sets FSM states processed by the other. As long as one side is running, it sets states that will be processed by the other side, and vice versa.

The QDIO protocol so far described is extended in the present invention to be used in a virtual-machine environment through minor additions along with careful design and attention to the following considerations.

A key aspect of QDIO is the shared-memory model by which the program and the adapter share a common queue structure and data areas in a computer's main memory. With the free-running cooperative processes described above, controlled by a set of FSMs in an SLSB for each data queue, the use of shared memory avoids the processor and channel-subsystem overhead of start-processing and one-for-one interruptions associated with traditional input/output operations.

Such a shared-memory model is problematic in the environment of a virtual machine, which is an image of a real machine created by a program called a virtual-machine hypervisor. The apparent real storage of the virtual machine is in fact pageable storage of the hypervisor. The adapter, lacking dynamic-address-translation (DAT) capability and the hypervisor's associated DAT tables, needs to know the actual real-storage addresses of the queue structures and data.

The shared-memory model of the QDIO protocol is simulated by the virtual-machine hypervisor through the use of "shadow" copies of key control blocks that are maintained by the hypervisor. The QDIO control-block structure is designed in such a way as to
5 carefully separate and isolate main-memory addresses from non-address information.

Among the QDIO control blocks, the storage list (SL) and storage-block-address list (SBAL) are designed specifically to contain addresses needed by the adapter. The queue-information block (QIB) and the storage-list-information block (SLIB) are designed specifically to exclude any such addresses. The memory pages containing the QIB and the SLIB are fixed in main memory by the hypervisor and, thus, follow the QDIO shared-memory model: the program accesses the QIB and the SLIB using addresses that are in fact virtual, while the adapter accesses these same control blocks with real addresses.

The SLs and SBALs are shadowed by the hypervisor. The SLSB is also shadowed, although it contains no addresses, because of its definition as the controlling mechanism for the program's and the adapter's cooperating processes. The changing of FSM states in the SLSB controls the program's and the adapter's access to the other queue components that require address translation, and hence, FSM state-changes must be gated and controlled by the hypervisor using the shadow-block mechanism.

The QDIO protocol is started by the existing START SUBCHANNEL (SSCH) machine instruction in the preferred implementation, but could be started by one or more new instructions defined for the purpose. For pageable virtual machines, SSCH is intercepted by the hypervisor so as
30 to begin the simulation of the QDIO protocol. During the

simulation of the Establish-QDIO-Queues channel command, the
hypervisor builds shadow copies of the SL, SBAL, and SLSB control
blocks. The queue-descriptor record (QDR) associated with the
Establish-QDIO-Queues command contains the main-memory addresses
5 of the QDIO queue components as seen by the program. The
hypervisor translates those addresses, as well as addresses
within the SL and SBALs, in building its own copy of the QDR
and the shadow SL and SBALs. Translation of addresses within the
SBALs may be delayed until the simulation of the Activate-QDIO-
10 Queues channel command if the program chooses to defer its data-
buffer assignments until the queues are activated.

Once the QDIO protocol is started, the virtual-machine
hypervisor needs to intervene to perform address translation
whenever the program presents a new set of empty or full buffers
to the adapter for inbound or outbound data, respectively. The
hypervisor also intervenes when synchronization is needed between
the program's original SLSB and the hypervisor's shadow SLSB used
by the adapter. Such address translation and SLSB
synchronization is implicit during the hypervisor's
20 interception of program-controlled interruptions (PCIs) and the
SIGA-w and SIGA-r instructions. The SIGA-s instruction causes
hypervisor intervention when there is no signal needed between
the program and the adapter in the non-virtual-machine
environment, but there is nevertheless a need for address
translation and SLSB synchronization for the virtual machine. In
25 the preferred implementation, SIGA-s is used by the program when
recovering emptied outbound buffers from the adapter and after a
program timer expires to signal the need for checking of SLSB
states on input queues.

30 The previously-described FSM definitions and sequencing
protocols for the SLSB support and make possible the operation of

QDIO in virtual machines. The concept of ownership of SBALs and data buffers, as embodied in the separate program-owned and adapter-owned states of the FSMs, means that the adapter never accesses main memory for which the adapter does not have ownership within the applicable FSM. Ownership is only transferred from program to adapter by the setting of an adapter-owned state in the FSM by the program and the subsequent synchronization of the program's FSM with the adapter's shadow FSM by the hypervisor, after the hypervisor performs the necessary address translation. Likewise, ownership is only transferred from adapter to program by the setting of a program-owned state in the FSM by the adapter and the subsequent synchronization of the real and shadow FSMs, after the hypervisor updates the applicable real SBALs from the shadow SBALs with, for example, the actual data count moved through the adapter.

The mutually-exclusive FSM-state subsets between the program and the adapter, with the rule of each side setting ownership by the other side to transfer processing between them, enables straight forward synchronization of the real and shadow SLSBs by the hypervisor. The hypervisor maintains a "hidden shadow" copy of the SLSB to reflect the state of the SLSB at the previous synchronization point. This permits easy recognition of changes made by the program to the real SLSB and by the adapter to the shadow SLSB, allowing the proper updates in each direction between the real and shadow SLSBs with one pass through the three copies of the SLSB at each synchronization point.

The mutually-exclusive FSM-state subsets and the sequencing rules through the SLSB entries further support virtualization by ensuring that synchronization by the hypervisor does not disrupt or interfere with concurrent operations by the program and the adapter on their respective copies of the SLSB. The boundaries

between program-owned and adapter-owned states constantly move downward through the SLSB and back to the top. Neither side looks beyond its own contiguous set(s) of owned FSMs, with the boundaries being apparent. This means the method of

5 synchronization by the hypervisor, whether top-down, bottom-up, or middle-to-middle in either direction, can have no lasting effect of disrupting the program's or the adapter's operation.

While the invention has been described in detail herein in accordance with certain preferred embodiments thereof, many modifications and changes therein may be effected by those skilled in the art. Accordingly, it is intended by the appended claims to cover all such modifications and changes as fall within the true spirit and scope of the invention.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213